


82E11 - GROUP AMPLIFIER EDGE CONNECTOR

From: 82E11


To: 611E/V Mother Card

No	Description	No	Description
1	0v	34	RG4 Control. Monitor Tape
2	0v	35	RG5 Control. Monitor Group
3	Group mix amp input -	36	RG6 Control. Monitor Tape + Group
4	Spare	37	RG7 Control. Supercue Tape
5	-18v	38	Small fader buffer input
6	+18v	39	RG9 Control. Supercue Tape + Group
7	Group trim pot ACW	40	RG3 Control. Monitor Mute
8	Group trim pot wiper	41	Small fader buffer output
9	Group mix amp input +	42	Monitor select buffer output
10	RG1 Control. Slate to o/p amp	43	RG8 Control. Supercue Group
11	Group output amp -	44	Quad bus routing buffer output
12	RG1 Input. Slate Signal	45	RG14 Signal from VCA o/p(82E13 p24)
13	RG2 Input. Direct switch output	46	RG13 Control. Small Fader to QB.
14	RG2 Control. Signal to o/p amp	47	RG13 Signal from SF CUT switch.
15	Group mix amp o/p to Direct switch	48	RG14 Control. VCA Fader to QB.
16	Group output amp +	49	0v
17	Pre small fader output	50	Direct signal output to direct sw.
18	Group Monitor input -	51	
19	Group Monitor input +	52	
20	Pre VCA fader output	53	
21	Tape Monitor input -	54	
22	Tape Monitor Input +	55	
23	VCA to meter signal (82E13 p19)	56	
24	Monitor signal input	57	
25	Channel signal input	58	
26	Mon/Chan signal output to small fdr	59	
27	Keyway	60	
28	RG15 Control. Monitor to small fdr	61	
29	RG16 Control. Channel to small fdr	62	
30	Meter signal output	63	
31	RG10 Control. Meter tape	64	
32	RG11 Control. Meter group	65	
33	RG12 Control. Meter VCA level	66	

Rev	Issued	Chkd	Details
15	a	3-87	
16	a	6-82	R99, 100 2K7 (WERE 4K7)
16	b		REDRAWN 4-84 D.D.
17	a	7-85	R99, 100, BAL. VALUES CHANGED
18	a	DM Jan 86	REPLACE R6 WITH MULTI-TURN PRESET
19	a	DM Mar 86	22p CAP ACROSS R96
19	b	Apr 86	ECON 19 AMENDED TO 29 ECON 34 ADDED

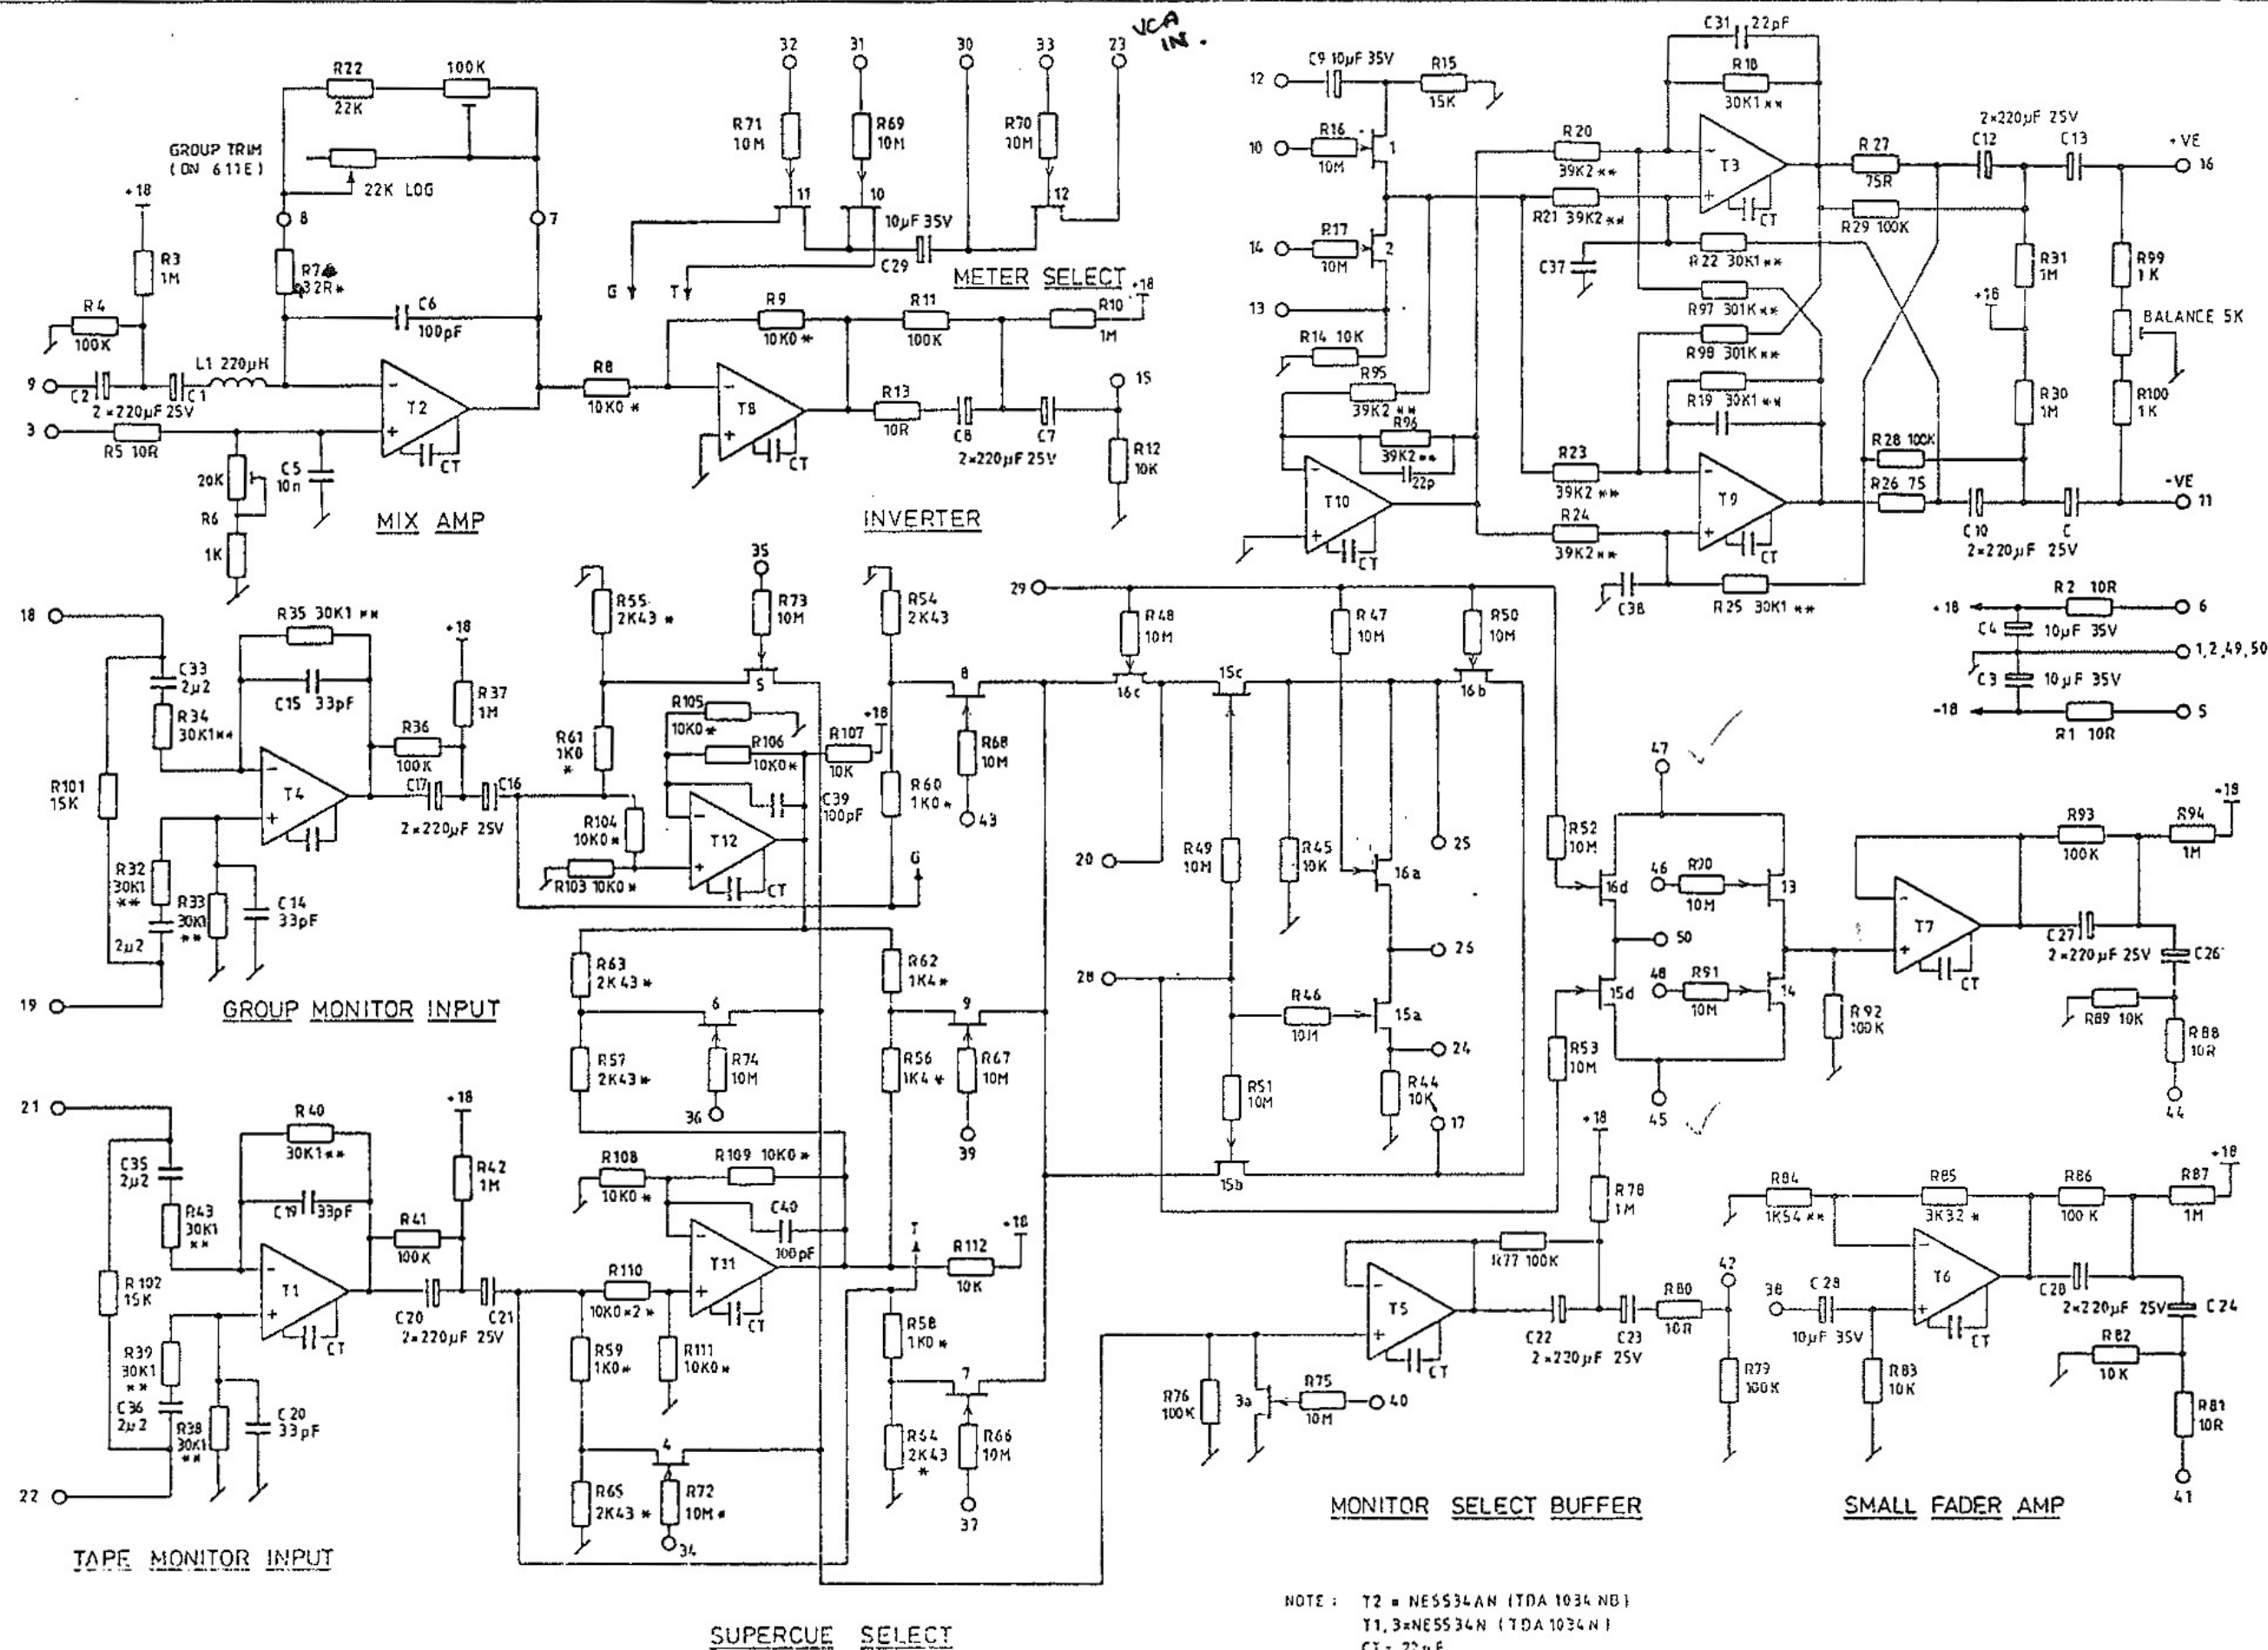

NOTE: T2 = NE5534AN (TDA 1034 ND)
T1, 3 = NE5534N (TDA 1034 N)
CT = 22pF
* = 0.5% TOL ** = 0.1% TOL

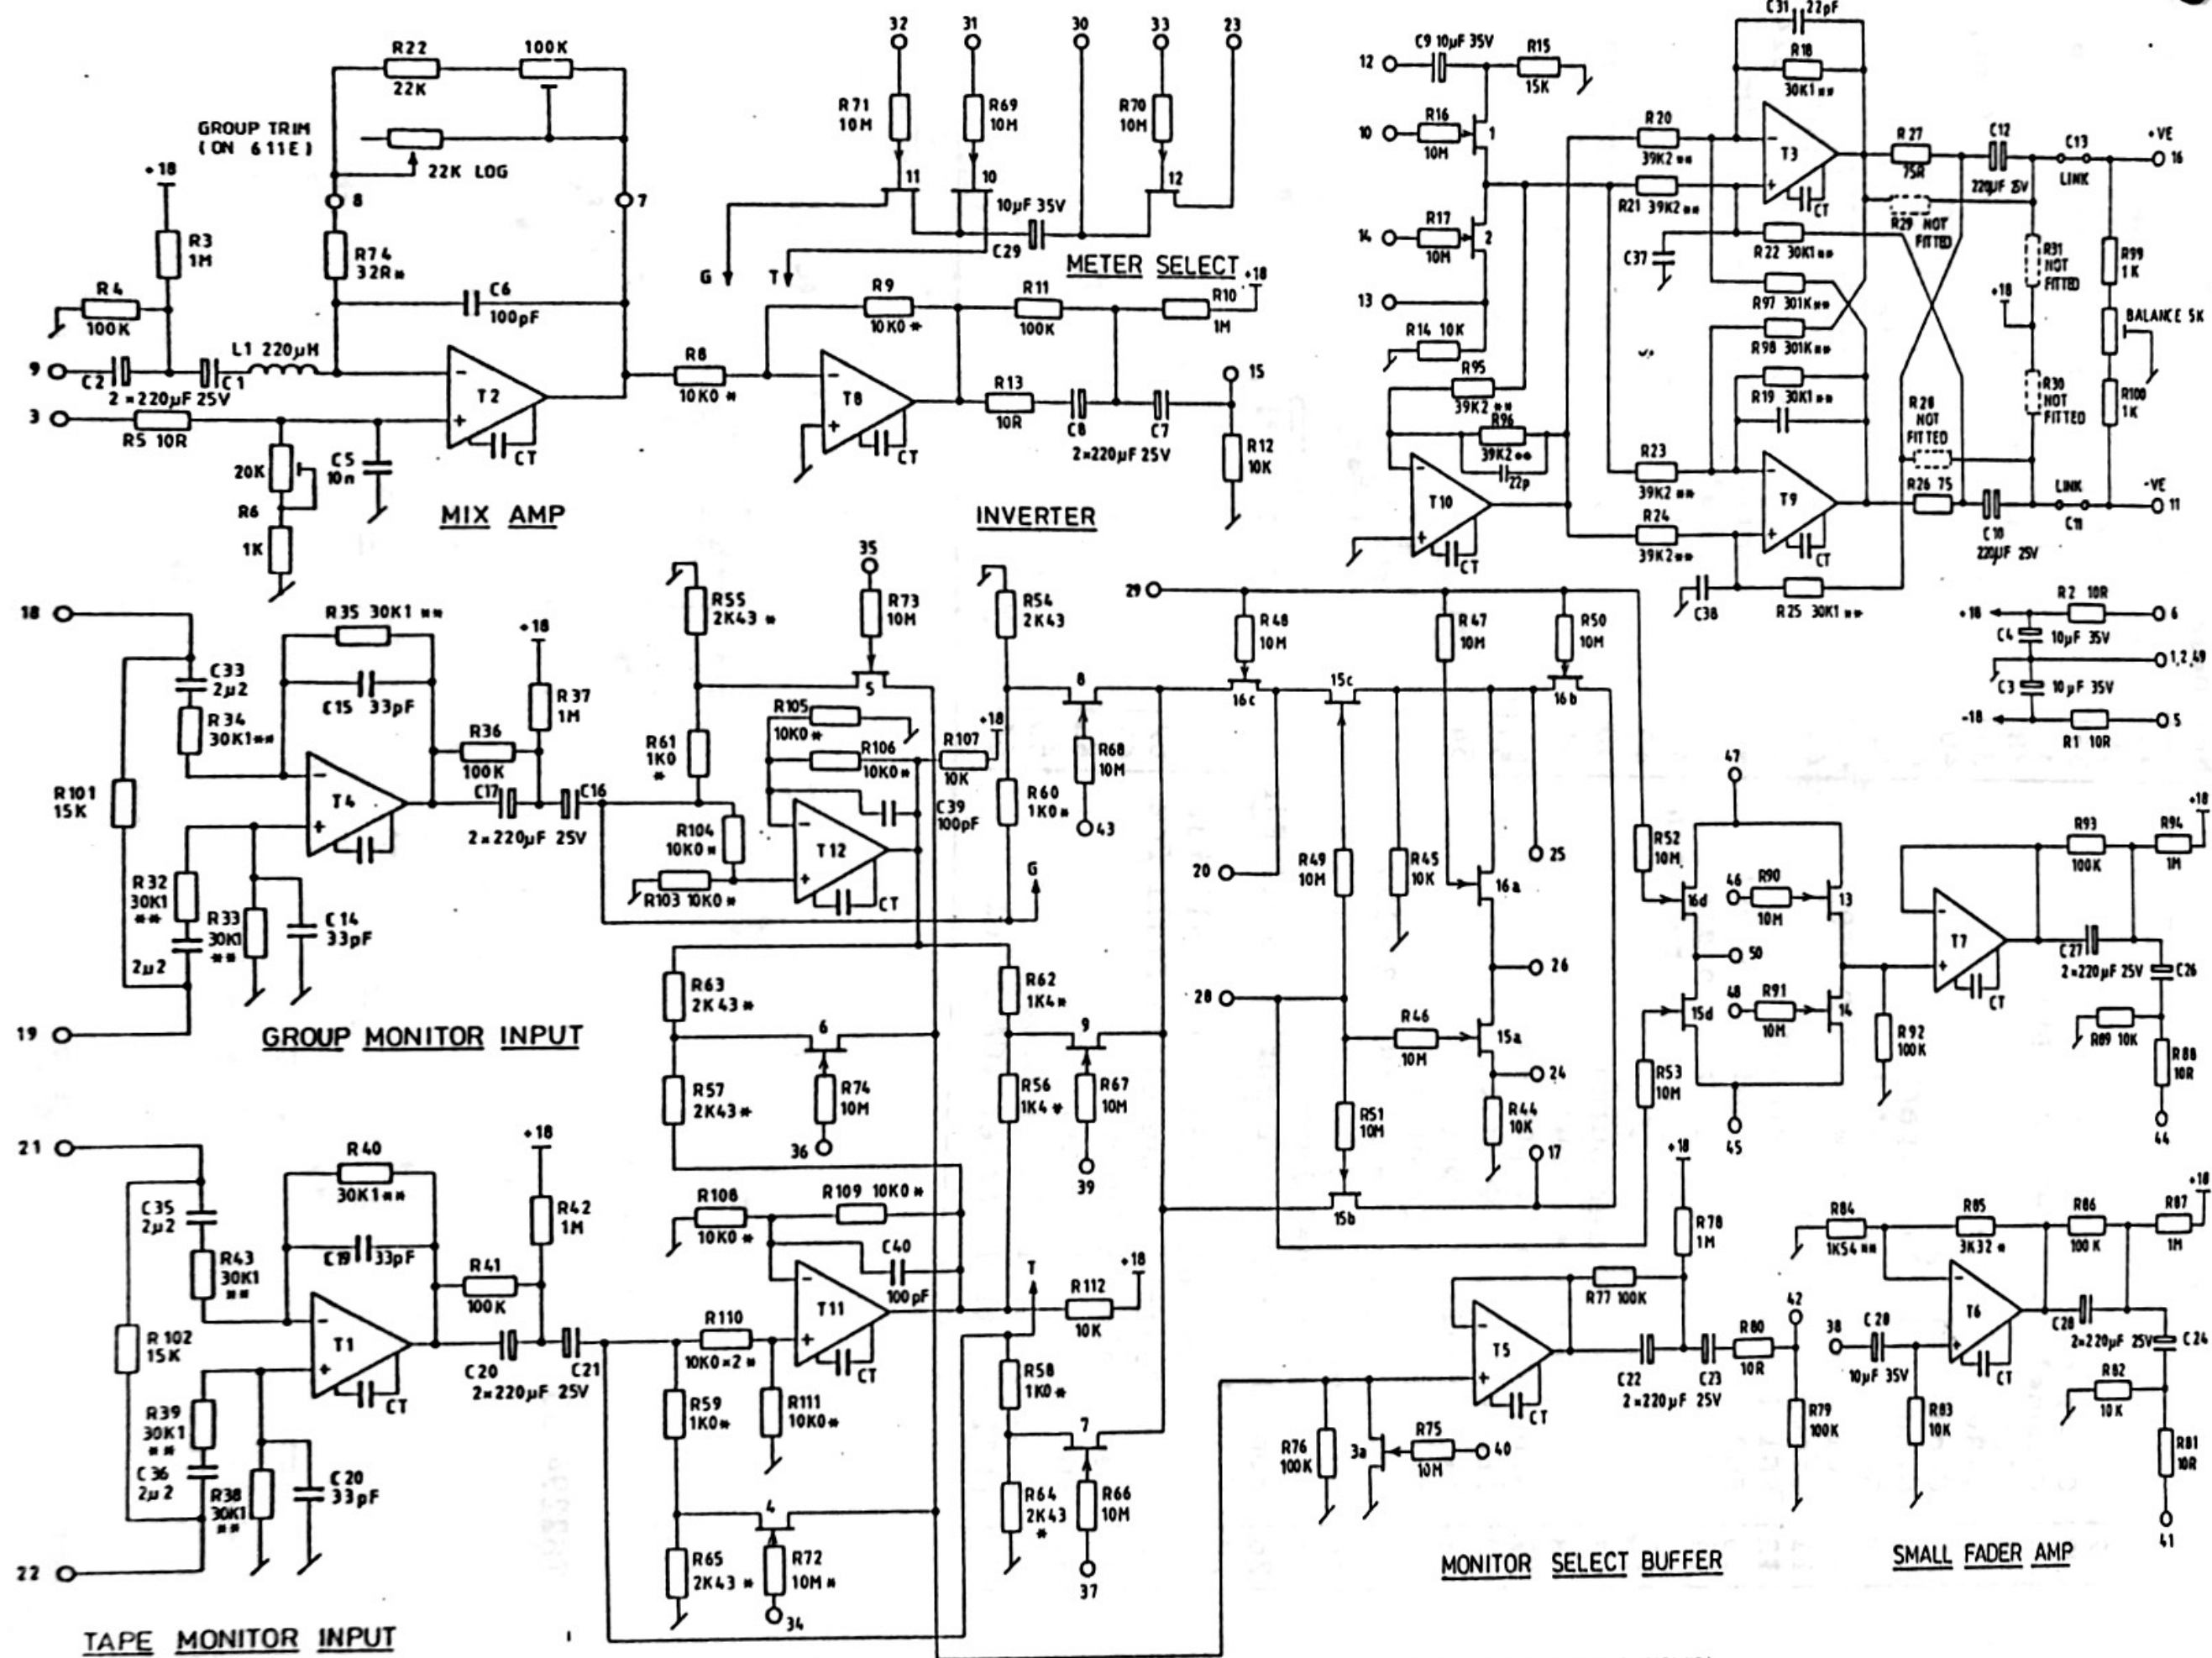

NOTE : T2 = NE5534AN (TDA 1034 NB)
 T1, 3 = NE5534N (TDA 1034 N)
 CT = 22pF
 * = 0.5% TOL ** = 0.1% TOL

Copyright © SSL All rights reserved.
 This document may not be reproduced in any form without the written permission of SSL.

Rev	Issue	Chkd	Details
15	a	382	
16	d	482	R99, 100 2K71WERE 4K7
16	b	485	REDRAWN 4-84 D.O
17	a	485	R99, 100, BAL. VALUES CHANGED
18	a	DM Jan86	REPLACE R6 WITH MULTI-TURN PRESET
19	a	DM Mar86	22p CAP ACROSS R96
19	b	Apr86	ECON 19 AMENDED TO 29 ECON 34 ADDED
21	a	May87	C10-13 WERE CAP. ELECT. 220UF 25V. R28, 29, 30 & 31 DELETED.
21	b	July87	RCOM 50 DELETED-WAS REPEATED AT RCOM 1,2 & 48.

Title
 GROUP AMPLIFIERS
 Org. No.
 T82011.71
 Solid State Logic